


ChemGrout®

CG050 Air Driven Grout Pump

CG050 SPECIFICATIONS

Pump Size	050 (2" Piston)
Flow Rate	Up to 19 Litres/minute
Pressure	16 Bars (230 PSI)
Power Options	Air Driven; Requires 400 litre/min (100 PSI)

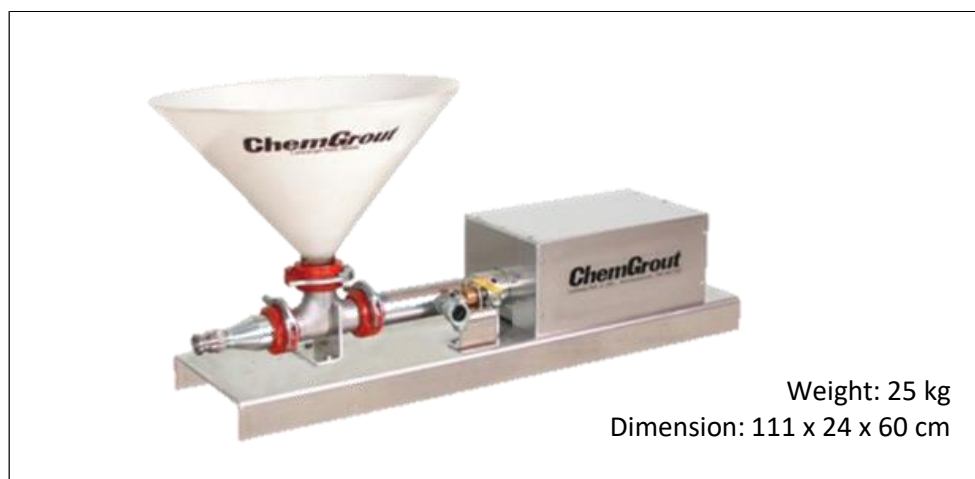

Skid mounted and portable, ideal for most pre-packaged, non-shrink grouts and sand/cement ratios of up to 2:1.

Lightweight aluminium construction offers portability for confined, hard to reach jobs.

Compact and portable, the ChemGrout Model CG-050 remains the industry's choice for efficient grouting of smaller applications. Designed for pumping grout mixes, high viscosity slurries and premixed grouts, it delivers up to 19 LPM with pressures to 225 psi.

Engineered for minimal maintenance, the 050 has only three wetted and five working parts. Quick disconnect couplings allow for rapid disassembly in just seconds for easy maintenance and clean-up. The safe, compressed air drive is especially suited for mines, tunnels and remote sites where fuel fumes are dangerous and electricity is unavailable.



ChemGrout, Inc., P.O. Box 1140, 805 E. 31st Street, LaGrange Park, IL 60526 USA • Phone: (708) 354-7112 • Fax: (708) 354-3881

Visit our web site: www.chemgrout.com • E-mail: cginfo@chemgrout.com