

ChemGrout® CG-500 Versatile Series

The CG-500 Series are balanced systems that enable high volume production and continuous mixing for a broad range of applications.

CG500/2C6/E
Electric Powered



Specially designed mix tank provides high shearing action for thorough and complete particle wetting, producing superior grout.

For grouting tunnels, shafts, dams, mines, void filling, tiebacks, piling encasements, rock grouting & wells.

Mixes & pumps neat cement or cement/sand grouts. Mixing & pumping all on one skid for fast mobilization.

Maximum output 20 gpm (76 lpm). Maximum pressure 174 psi (12 Bar), optional 261 psi (18 Bar).

Two 70 gallon (265 liter) mixing tanks & a 15 gallon (57 liter) holding hopper allows continuous production.

Power options include air, hydraulic, electric/hydraulic gas/hydraulic & diesel/hydraulic.

ChemGrout®
Widest Selection of Grouting Equipment in the World

Versatile Series – High Output, Continuous Operation

Highly versatile, the CG-500 handles a broad range of grouting applications including tunnels, shafts, dams, plant maintenance and geotechnical works. The unique twin mix tank design permits continuous pumping as each tank alternates feeding the hopper. This non-stop pumping process maximizes the batching of materials such as neat cement, sand/cement, and most commercial pre-bagged grouts.

Two high-capacity 70-gallon mixing tanks, pump, and 15-gallon holding hopper are all mounted on a single skid for quick, easy set-up and immediate operation. The holding hopper includes an internal auger that keeps the material thoroughly mixed while supplying the pump.

The open throat grout pump features a non-pulsating positive displacement rotor-stator that provides a constant discharge of materials. This progressing cavity pump is variable speed with an output of up to 20 gpm with a standard maximum pressure of 174 psi (261 psi optional).




CG-500GH
Gas/Hydraulic

Specifications

CG500-E	
Pump Type	3C6 Open Throat, Non-Pulsating
Maximum Output	76 lpm
Maximum Pressure	18 bar
Drive	Electric / Hydraulic
Power	3 Phase / 50Hz / 32A / 380V
Weight	704 kg
Size (mm)	2236 x 864 x 1474

Industries

Tunneling	Well Drilling	Geotechnical
Construction	Mining	Municipal
Restoration	Highway	

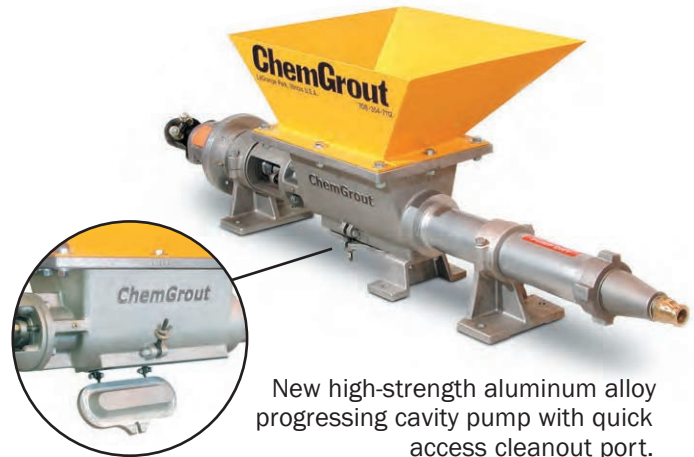

New high-strength aluminum alloy progressing cavity pump with quick access cleanout port.

Accessories

Grout Hose. Equipped with quick disconnect fittings. Available in 25 and 50 foot lengths.



Water Meters. Available in manual or automatic. Accurately measures the water for each batch.



Diaphragm Protected Pressure Gauge.



Mechanical Surface Packer. Equipped with shut-off valve and a quick disconnect fitting.

Applications include:

Soil compaction, rock grouting, void-filling, waterproofing, soil anchors, cable bolts, rock bolts, well encasements, contact grouting, well abandonment, marine/underwater, post tensioning, precast, machine base installation, self-leveling floor underlayments, slab undersealing and slabjacking.



ACME EQUIPMENT

11 Buroh Street, 627550 Singapore
+65 6862 2332 · info@acme.com.sg

www.acme.com.sg | [AcmeEquipment](#) @ Facebook · Youtube · Instagram