


CG050 & CG030

Air-Driven Piston Grout Pump

Engineered for ease of use and convenience, the CG050 and CG030 are designed to maximize your work efficiency by streamlining every steps of your grouting project.

Both models features modular design, quick couplings or U-lock system, enabling fast disassembly for easy cleaning and maintenance. This user-focused design promotes regular care routines and helps extend their service life, keeping your project right on track.



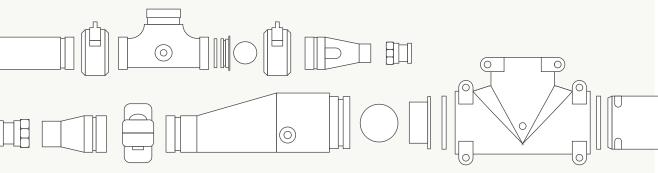





ChemGrout ChemGred

CG050

Weight

Pump Configuration 2" Piston Pump
Qutlet Size 1"
Air Compressor Req. 15 CFM
Max Output Rate 19 L/min
Max Pressure 16 bar
Hopper Size 19 L
Dimension L 1118 mm
W 280 mm

Engineered to be portable and convenient, the CG050 is the ideal choice for small-scale grouting application. Its featherweight aluminium construction also allows it to be carried easily and fit into any space constraint site.

Engineered to be portable and convenient, the CG050 is the ideal choice for small-scale grouting

788 mm

24 kg

CG030

Pump Configuration 3" Piston Pump 1.25" **Qutlet Size** Air Compressor Reg. 100 CFM 60 L/min Max Output Rate Max Pressure 27 bar 68 L Hopper Size L 1372 mm Dimension W 661 mm H 686 mm Weight 150 kg

The CG030 is built for power and versatility, enabling a wider range of applications. From cement slurries to sanded mixes, its large 3" piston pump is very capable while still maintaining a relatively small footprint.

















Common Spare Part & Accessories