



# MortarMaster **SWING-L**

Universal Progressive Cavity Pump




The Swing-L offers a wide range of applications including grouting, mortar conveying, and spraying when paired with an air compressor and spray gun.

Designed with ease of operation and maintenance in mind, it features an easily washable hopper, centralized control panel, simple disassembly process, and a rotor-stator with tensioning screw for extended service life.

Spare parts and accessories are readily available at our Singapore office.

## Specification

|                    |                                   |
|--------------------|-----------------------------------|
| Power              | 400V / 3 Ph / 50Hz                |
| Conveying Speed    | 4 - 90 L/min                      |
| Conveying Distance | up to 30 m                        |
| Working Pressure   | up to 30 bar                      |
| Max Aggregate Size | 6 mm                              |
| Filling Height     | 600 mm                            |
| Hopper Volume      | 70 L                              |
| Weight             | 135 kg                            |
| Dimension          | L 1500 mm<br>W 575 mm<br>H 660 mm |

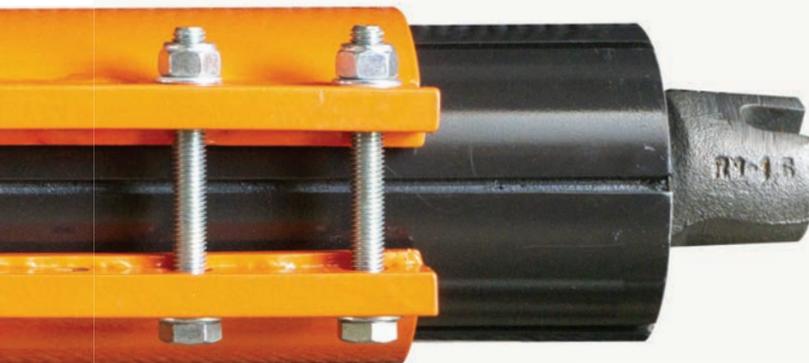

Adjustable Stator Module Allows Low Maintenance Cost Operation

Low Filling Height, Fits Easily Under Mixer

Conveying Speed Adjustable Smoothly

Continuous and Even Output

Compact Body for Easy Transportation

Easy to Clean & Maintain

Spare Parts & Accessories Available



**ACME EQUIPMENT**

info@acme.com.sg • www.acme.com.sg • +65 6862 2332