

GROUTING HOSE

For Grouting, Plastering, Spraying, and Other Conveying Application



ACME EQUIPMENT

info@acme.com.sg • www.acme.com.sg • +65 6862 2332

HOSE & FITTING


Precision Engineered

Our reputable factories consistently manufacture high-quality hoses and fittings tailored to your specific application.



Tested & Certified

Testing is essential to ensure that you receive exactly what you need, it also guarantees that our products are safe and reliable for your use. Every tested products are certified and meets our standards.

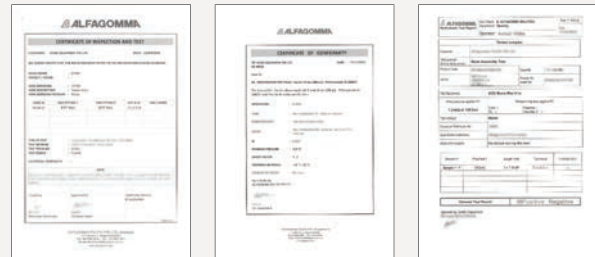

IDed for Your Convenience

Every hose and pre-built fitting is stamped with a unique ID, allowing both you and us to track and service it more efficiently. Look out for etched or stamped numbers on our product.



Grout Hose Specification

	1 inch	1.25 inch	1.5 inch	2 inch
Inner Diameter	25 mm (1")	32 mm (1.25")	35 mm (1.5")	38 mm (2")
Outer Diameter	38 mm (1.5")	46 mm (1.81")	49 mm (1.93")	54 mm (2.13")
Max. Working Pressure	40 bar (600 PSI)	40 bar (600 PSI)	40 bar (600 PSI)	40 bar (600 PSI)
Burst Pressure	100 bar (1500 PSI)	100 bar (1500 PSI)	100 bar (1500 PSI)	100 bar (1500 PSI)
Weight	700 g/m	870 g/m	960 g/m	1190 g/m

Coupling Type

