

GUNITE HOSE

For Reed SOVA, LOVA, Dry Shotcrete Application



ACME EQUIPMENT

info@acme.com.sg • www.acme.com.sg • +65 6862 2332

HOSE & FITTING


Precision Engineered

Our reputable factories consistently manufacture high-quality hoses and fittings tailored to your specific application.



Tested & Certified

Testing is essential to ensure that you receive exactly what you need, it also guarantees that our products are safe and reliable for your use. Every tested products are certified and meets our standards.

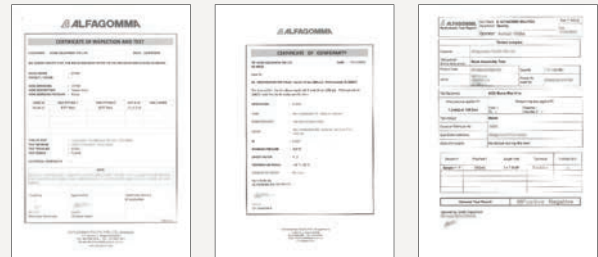

IDed for Your Convenience

Every hose and pre-built fitting is stamped with a unique ID, allowing both you and us to track and service it more efficiently. Look out for etched or stamped numbers on our product.



Gunite Hose Specification

1.5 inch

Inner Diameter	38 mm (1.5")
Outer Diameter	62 mm (2.44")
Max. Working Pressure	14 bar (200 PSI)
Burst Pressure	42 bar (600 PSI)
Weight	2,200 g/m

High Performance

Reinforced with High Tensile Steel Cord

Abrasion Resistant

-30°C to 80°C for Optimal Performance

Fire Resistant Anti-Static Exceedd AS2660/C

Exceed AS2660 Class C

FRAS APPROVED

Coupling Type

